



BL50 DRUM MOTOR

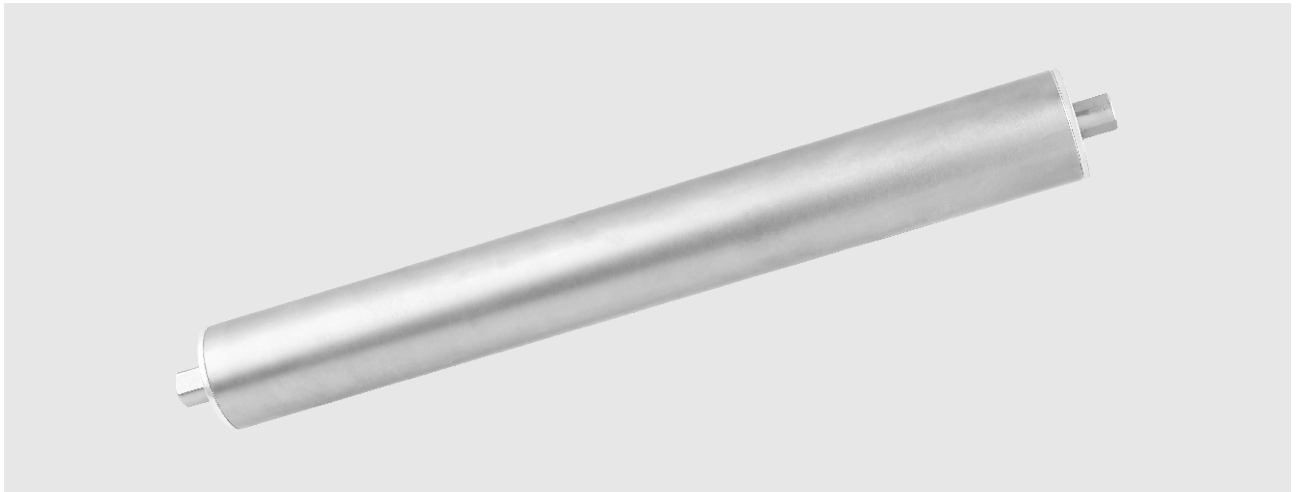

BL50 Outlining Dimensions

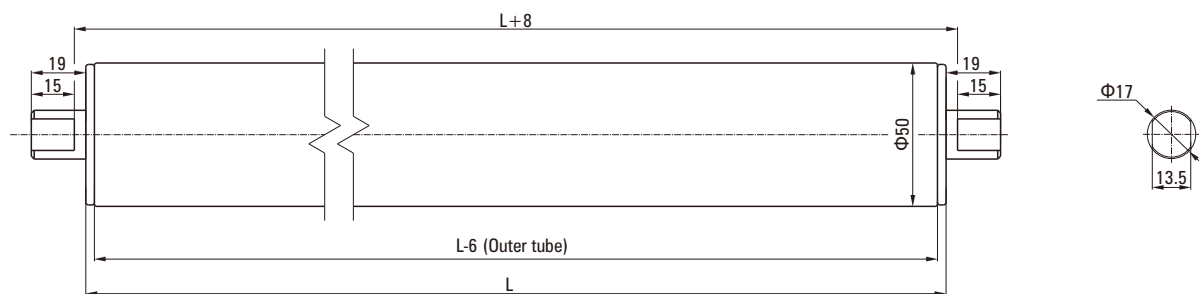

Lead Out Outlet

Yellow(thick)	Green(thick)	Blue(thick)	Yellow/Green
U	V	W	PE

- Diameter: $\Phi 50$
- Wall thickness: $t1.5$
- Material of the outer tube: SUS304
- Carbon steel: Zinc plating

BL50 Mechanical Parameters

● Drum Shell

Voltage 220V

Rated Power P W	Gear Box Series	Reduction Ratio i	Max Speed V m/min	Rated Speed n RPM	Rated Torque T Nm	Traction F N	Length L mm
60	1	5.18	91	579.10	0.89	35.62	260
	2	13.69	34	219.14	2.12	84.72	265
		19.16	25	156.58	2.96	118.57	
		26.83	18	111.82	4.15	166.03	
		34.96	13	85.81	5.41	216.35	
	3	50.65	9	59.23	7.05	282.10	270
		70.91	7	42.31	9.87	394.94	
		99.27	5	30.22	13.82	552.89	