




BL60 DRUM MOTOR

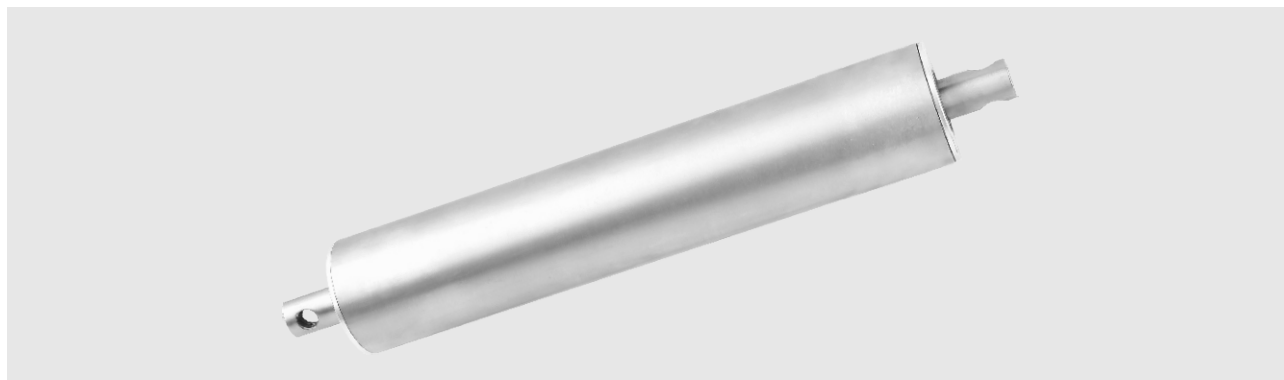

BL60 Outlining Dimensions

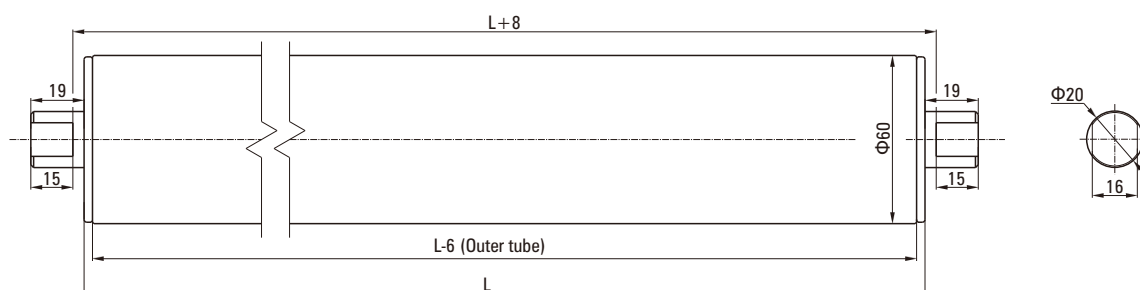

Thread hoisting

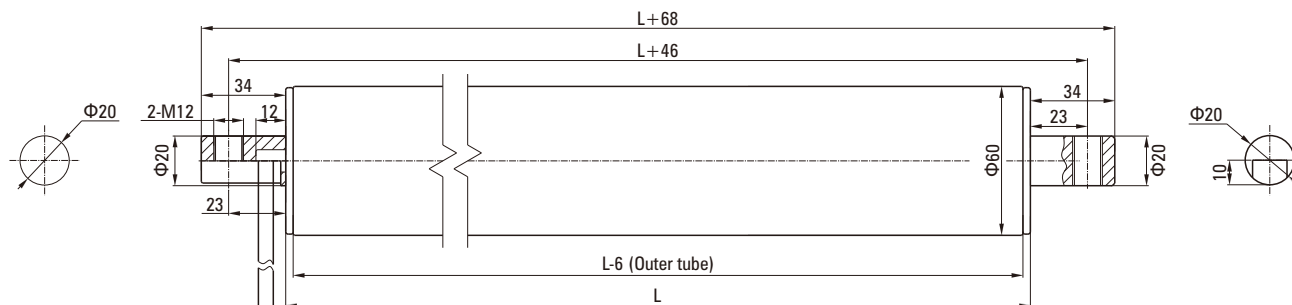

Lead Out Outlet

Yellow ^(thick)	Green ^(thick)	Blue ^(thick)	Yellow/Green
U	V	W	PE

- Diameter: $\Phi 60$
- Wall thickness: t1.5
- Material of the outer tube: SUS304
- Carbon steel: Zinc plating

BL60 Mechanical Parameters

● Drum Shell

Voltage 220V

Rated Power P W	Gear Box Series	Reduction Ratio i	Max Speed V m/min	Rated Speed n RPM	Rated Torque T Nm	Traction F N	Length L mm
60	1	5.18	109	579.10	0.89	29.68	300
	2	13.69	41	219.14	2.12	70.67	305
		19.16	30	156.58	2.96	98.67	
		26.83	21	111.82	4.15	138.33	
		34.96	16	85.81	5.41	180.33	
	3	50.65	11	59.23	7.06	235.33	310
		70.91	8	42.31	9.89	329.67	
		99.27	6	30.22	13.84	461.33	