




BL60 DRUM MOTOR

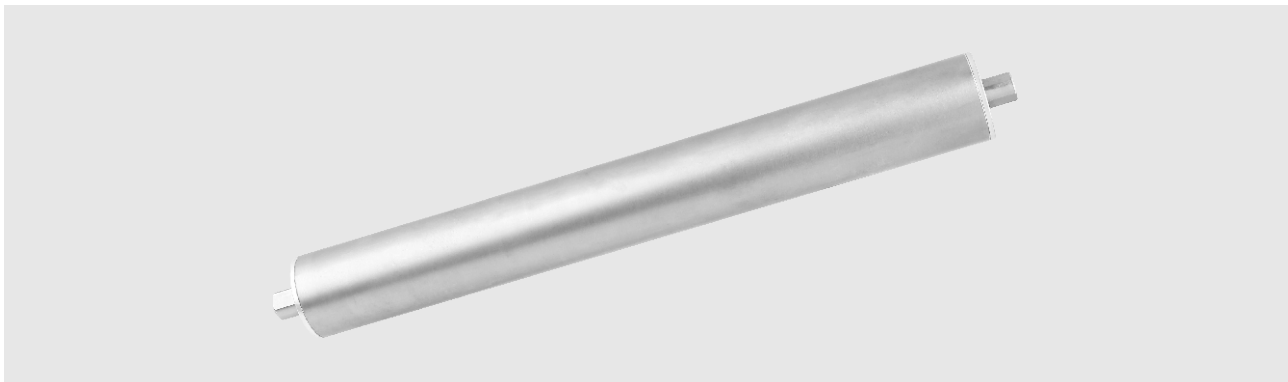

BL60 Outlining Dimensions

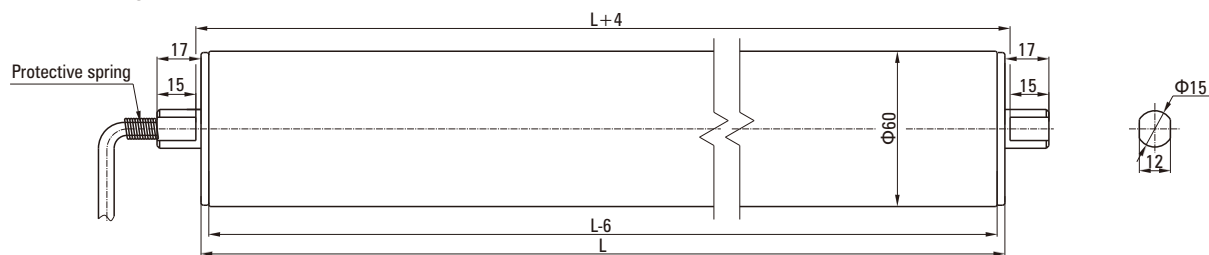

Belt line

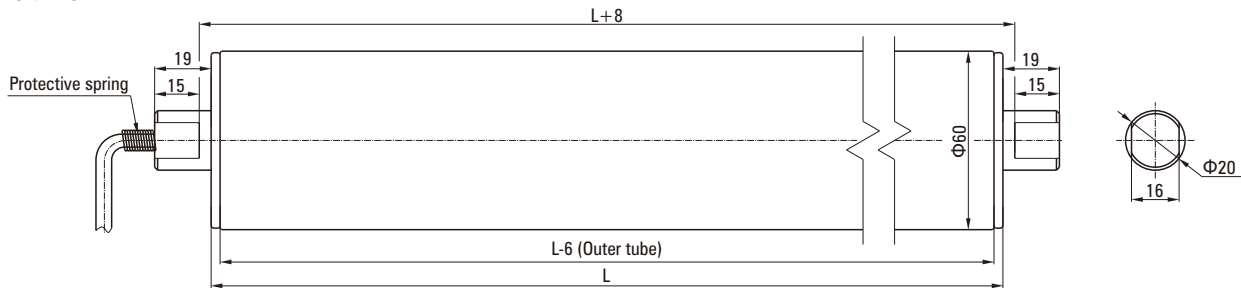

Lead Out Outlet

Blue (thick)	Yellow (thick)	Green (thick)	Red (fine)	Yellow (fine)	Green (fine)	Blue (fine)	black (fine)
W	U	V	Vcc+5V	Hu	Hv	Hw	GND

- Diameter: $\Phi 60$
- Wall thickness: t1.5
- Material of the outer tube: SUS304
- Carbon steel: Zinc plating

BL60 Mechanical Parameters

● Drum Shell

Voltage 24V/48V

Rated Power P W	Gear Box Series	Reduction Ratio i	Max Speed V m/min	Rated Speed n RPM	Rated Torque T Nm	Traction F N	Length L mm
60	1	3.65	155	821.9	0.630	20.91	290
		5.36	106	559.7	0.920	30.71	
		6.55	86	458.0	1.130	37.53	
		8.63	66	347.6	1.480	49.45	
	2	13.53	42	221.7	2.090	69.77	305
		18.92	30	158.6	2.930	97.57	
		24.65	23	121.7	3.810	127.12	
		33.92	17	88.44	5.250	174.93	
	3	44.69	13	67.13	6.910	230.47	320
		67.08	8	44.72	9.350	311.77	
		91.36	6	32.84	12.74	424.61	
		165.64	3	18.11	23.10	769.84	